

VACCO Industries

PhotoPore

Standard VACCO PhotoPore Sheets used for multiple different functions
Matrix showing perforated patterns


Part #	Thick	Hole Size	Tolerance	On-Center	Array	~Open%
2-5-01	0.002	0.005	+/-0.001	0.008	60 deg.	35%
2-11-02S	0.002	0.011	+/-0.001	0.014	Staggered	60%
2-20-03S	0.002	0.020	+/-0.001	0.023	Staggered	80%
4-6-01	0.004	0.006	+/-0.001	0.010	60 deg.	15%
5-7-01	0.005	0.007	+/-0.001	0.012	60 deg.	17%
5-11-02	0.005	0.011	+/-0.001	0.017	60 deg.	38%
8-9-01	0.008	0.009	+/-0.0015	0.0155	60 deg.	31%
8-12-02	0.008	0.012	+/-0.0015	0.018	60 deg.	40%
10-13-01	0.010	0.013	+/-0.0015	0.020	60 deg.	38%
10-15-02	0.010	0.015	+/-0.0015	0.025	90 deg.	28%
15-20-01	0.015	0.020	+/-0.002	0.035	60 deg.	30%
18-20-01 **	0.018	0.020	+/-0.002	0.035	90 deg.	25%
25-33-01 **	0.025	0.033	+/-0.003	0.055	90 deg.	28%

General Notes of Standard PhotoPore Perforated Products:

- 1) Produced using 300 Series Stainless Steel
- 2) Minimum Etched Perforated Area is 16" x 16" (** 23" x 23")
- 3) Approximate Overall Sheet Size is 17" x 17" (** 24" x 24")
- 4) Standard PhotoPore Products may contain some unetched holes
- 5) Diagram below shows PhotoPore patterns at a 6:1 ratio

General Notes for placing purchase order:

- 1) F.O.B. South El Monte, CA
- 2) Minimum Purchase Order required is two sheets of any one given part number
- 3) PhotoPore orders totaling over \$4,000 will receive an additional 5% discount

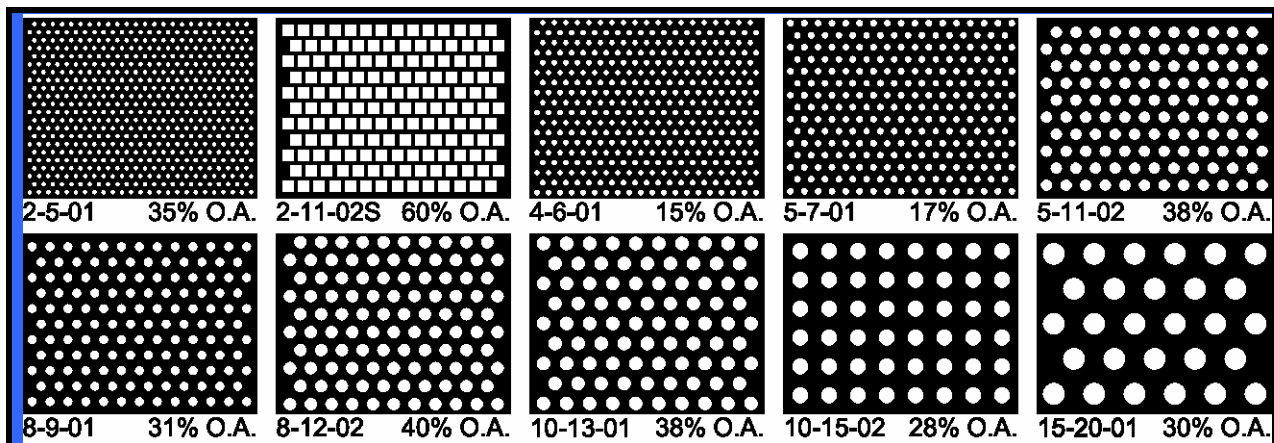

VACCO Industries - 10350 Vacco Street - So. El Monte CA 91733
Ph. 626-443-7121 - Fax 626-350-0533 - Email etch@vacco.com

vacco-etch.com